


# Automotive Wash Wiper Timer

**IL33197A**

The IL33197A is a standard wiper timer control device designed for harsh automotive applications. The device can perform the intermittent, after wash, and continuous wiper timer functions. It is designed to directly drive a wiper motor relay. The IL33197A requires very few external components for full system implementation. The intermittent control pin can be switched to ground or Vbat to meet a large variety of possible applications. The intermittent timing can be fixed or adjustable via an external resistor. The IL33197A is built using bipolar technology and parametrically specified over the automotive ambient temperature range and 8.0 to 16 V supply voltage. The IL33197A can operate in both front and rear wiper applications.

- Adjustable Time Interval of Less Than 500 ms to More Than 30 s
- Intermittent Control Pin Can Be Switched to Ground or Vbat
- Adjustable After Wipe Time
- Priority to Continuous Wipe
- Minimum Number of Timing Components
- Integrated Relay Driver With Free Wheeling Protection Diode
- Operating Voltage Range From 8.0 to 16 V
- For Front Wiper and Rear Wiper Window Applications

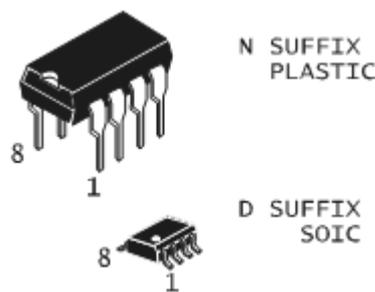


**ORDERING INFORMATION**

IL33197AN	DIP
IL33197AN-01	DIP
IL33197AD	SOIC
IL33197AD-01	SOIC
T <sub>A</sub> = -45° to 105°C	(SOIC)
T <sub>A</sub> = -45° to 125°C	(DIP)

**MAXIMUM RATINGS**


Rating	Symbol	Value	Unit
Continuous Supply Voltage (V <sub>Pin 6</sub> )	V <sub>CC</sub>	16	V
Storage Temperature	T <sub>stg</sub>	-55 to +150	°C
Thermal Resistance (Junction-to-Ambient)	R <sub>θJA</sub>		°C/W
DIP-8 Package		100	
SO-8 Package		145	
Operating Ambient Temperature Range	T <sub>A</sub>		°C
DIP-8 Package		-45 to +125	
SO-8 Package		-45 to +105	
Operating Junction Temperature Range	T <sub>J</sub>	-40 to +150	°C
Maximum Junction Temperature	T <sub>J(max)</sub>	150	°C

\* Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

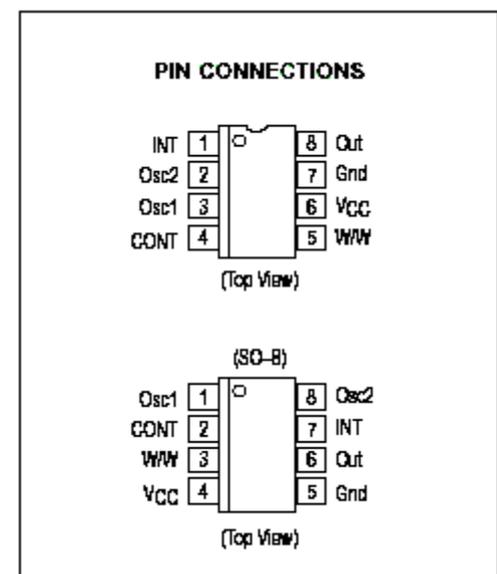

**Representative Block Diagram**


This device contains 390 active transistors.

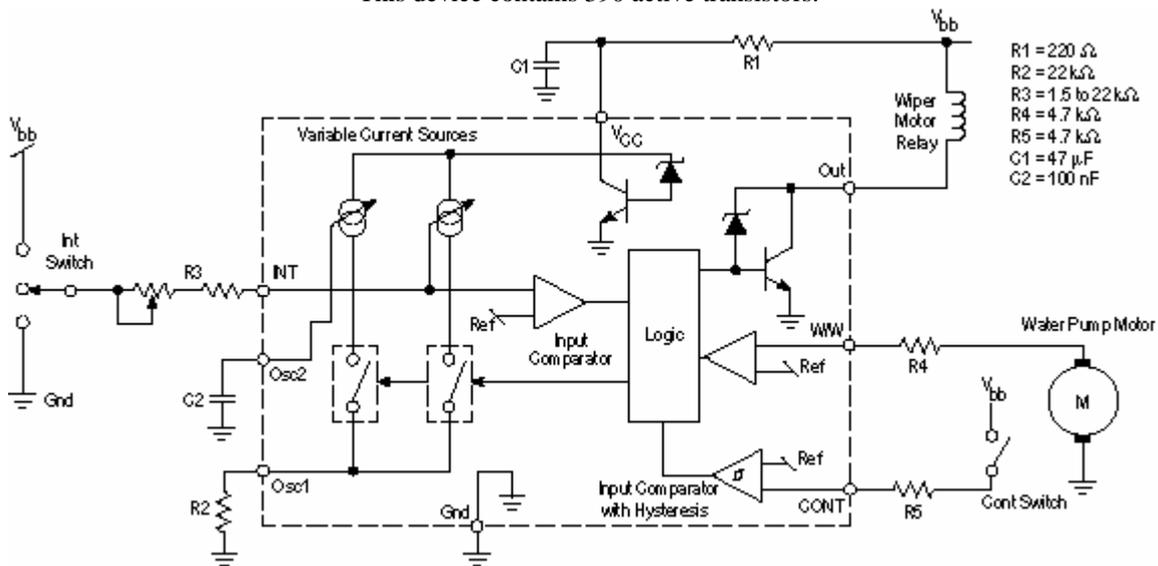

Characteristic	Symbol	Min	Typ	Max	Unit
Functional Supply Voltage Range	V <sub>CCF</sub>	8.0	–	18	V
Operating Supply Voltage Range	V <sub>CCOP</sub>	8.0	–	16	V
Standby Supply Current (V <sub>CC</sub> = 13 V, R <sub>2</sub> = 68 k)	CC	–	4.0	5.2	mA
Supply Current INT Active (R <sub>3</sub> = 2.5 k)	CC	–	7.0	3.4	mA
Supply Current Relay "On" (R <sub>2</sub> = 68 k)	CC	–	7.5	1.2	mA
Supply Current INT and Relay "Or" (R <sub>2</sub> = 68 k, R <sub>3</sub> = 2.5 k)	CC	–	10	14.5	mA
Oscillator Variations with Supply Voltage and Temperature (excluding external component tolerances, C <sub>2</sub> = 100 nF polyester capacitor) (Notes 1 & 2) 10 V ≤ V <sub>bb</sub> ≤ 16 V 8.0 V ≤ V <sub>bb</sub> ≤ 16 V	K <sub>osc</sub>	–	10 15	–	%
Relay Resistance	R <sub>L</sub>	60	–	–	Ω
Output Voltage (I <sub>OUT</sub> = 200 mA)	V <sub>out</sub>	–	0.9	1.5	V
Output Clamp Voltage (I <sub>OUT</sub> = 20 mA) (for IL33197AN/D) (for ILA33197AN/D-01)	V <sub>cl</sub>	19.5 27	–	22 32	V
Oscillator Period Coefficient (T <sub>A</sub> = 25°C) V <sub>bb</sub> = 13 V (Note 3) V <sub>bb</sub> = 13 V (INT Connected to Gnd) (Note 4) V <sub>bb</sub> = 13 V (INT Connected to V <sub>bat</sub> , R <sub>1</sub> = 220 Ω) (Note 4)	t <sub>b1</sub> t <sub>b2g</sub> t <sub>b2v</sub>	0.98 15.1 11.5	1.0 15.5 12.1	1.03 15.9 12.7	–
CONT Threshold (V <sub>CC</sub> = 13 V)	V <sub>ih</sub>	6.0	–	3.5	V
CONT Threshold (V <sub>CC</sub> = 16 V)	V <sub>ih</sub>	–	V <sub>CC</sub> /2	–	V

**ELECTRICAL CHARACTERISTICS** (–45°C ≤ T<sub>A</sub> ≤ +125°C, 8.0 V ≤ V<sub>CC</sub> ≤ 16 V, unless otherwise noted. Typical values reflect approximate mean at T<sub>A</sub> = 25°C with V<sub>CC</sub> = 14 V at the time of initial device characterization.)

- NOTES:**
- The oscillator frequency is defined by the current flowing through the external resistor R2. The voltage at the INT pin is (V<sub>CC</sub>/2 – V<sub>be</sub>) and hence the current flowing through R3 is different if R3 is connected to V<sub>bb</sub> or to Gnd because of the voltage drop across resistor R1. This voltage drop causes the oscillator coefficient for t<sub>b2</sub> to be different for the two cases of INT terminated to Gnd or to V<sub>bb</sub>. Because of this, the oscillator coefficient is specified with a specific value of R1 whenever INT is connected to V<sub>bb</sub>. If R1 is changed, the coefficient will change. Also, any extra current through the resistor R1 other than the current used by the device will cause timing deviations in t<sub>b2</sub> timings (as in the case where two devices are sharing a common R1 resistor).
  - The oscillator stability with temperature is dependent on the temperature coefficients of the external components. If the capacitance value of the external capacitor varies more than 5% over the parametric temperature range, the figures quoted for oscillator variation are not valid.
  - The t<sub>b1</sub> duration is given by coefficient 4 x R2 x C2 (t<sub>b1</sub> duration = t<sub>b1</sub> x 4 x R2 x C2).
  - The t<sub>b2</sub> duration is given by coefficient x R3 x C2 (t<sub>b2</sub> duration = t<sub>b2</sub> x R3 x C2).

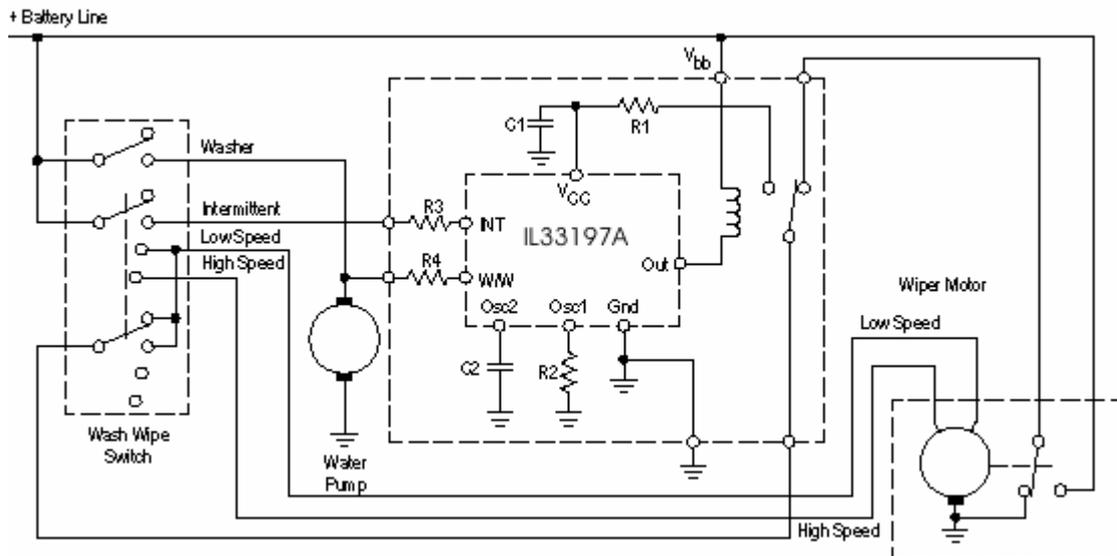

**Figure 1. Intermittent Wash Wiper Typical Application**

This application shows the IL33197A with the external wirings and two speed wiper motor. This application has the Intermittent and Wash Wiper functions.

## INTRODUCTION

The IL33197A is a wiper timer control device designed for use in harsh automotive applications. The device can perform the intermittent, after wash, and continuous wiper timer functions. The IL33197A is designed to directly drive a wiper motor relay. The IL33197A is suitable for both front and rear wiper applications. The IL33197A connects directly to the vehicle's battery voltage ( $V_{bat}$ ) through a  $220\Omega$  resistor used with a  $47\ \mu\text{F}$  de-coupling filter capacitor. The device has an internal oscillator controlled by one of two external resistors ( $R_2$  and  $R_3$ ) in addition to one external capacitor ( $C_2$ ), dependent on the application function required. The values of  $C_2$  and  $R_2$  determine the  $t_{b1}$  time base.  $t_{b1}$  is used to generate the relay wiper activation during the INT function ( $T_3$ ) and the after wash timing ( $T_2$ ) during the wash wipe mode. The values  $C_2$  and  $R_3$  determine the  $t_{b2}$  time base. The  $t_{b2}$  time base is used to generate the pause or intermittent time ( $T_4$ ). The intermittent wiper function can generate intermittent timing ( $T_4$ ) from less than 500 ms to more than 30 seconds. The intermittent function of the device can be activated by the INT input connected to either ground or  $V_{bat}$ . The intermittent timing is externally adjustable by changing the value of resistor  $R_3$ . The wash wiper timer function detects the water pump motor's operation. When the pump motor activation is detected, the IL33197A turns the wiper on for the entire duration of the pump motor's activation. When the motor is turned off, it generates an after wash timing ( $T_2$ ) to maintain the wiping action. The W/W pin is connected to the water pump motor through a protection resistor ( $R_4$ ). The IL33197A also has a continuous function, which activates the wiper relay whenever the CONT input is activated. The CONT input is connected to a switch through a protection resistor ( $R_5$ ). The CONT input comparator has an input threshold of  $V_{bb}/2$  with hysteresis. The device has internal debounce circuitry, based on the oscillator period. This provides filtering of the intermittent (INT) and wash wipe (W/W) input signals (see T1 Debounce Timing paragraph that follows). The device directly drives the wiper motor relay. It internally incorporates a 20 V free wheeling zener diode to protect the device against overvoltage spikes produced when relay is switched off.


### Intermittent Operation

Conditions:

- W/W not connected or connected to ground.
- CONT not connected or connected to ground.
- INT connected to  $V_{bb}$  or to ground.

In this configuration, the circuit will respond to the switching of INT to either  $V_{bb}$  or ground after a time  $T_1$  (see T1 Debounce Timing). If INT is disconnected before the end of  $T_1$ ; no action will be taken. After a time  $T_1$ , the output will be switched on for a duration,  $T_3 = 16 \times 4 \times t_{b1}$  and then switched off for a duration,  $T_4 = 144 \times 4 \times t_{b2}$ . This sequence will continue to repeat so long as INT is disconnected from  $V_{bb}$  or ground for a time duration greater than  $T_1$ . If INT is disconnected during the time  $T_3$ ; the output will remain on for the remainder of  $T_3$ . This is illustrated in the diagram on Figure 2.

Figure 2. Switching Waveform INT Timing

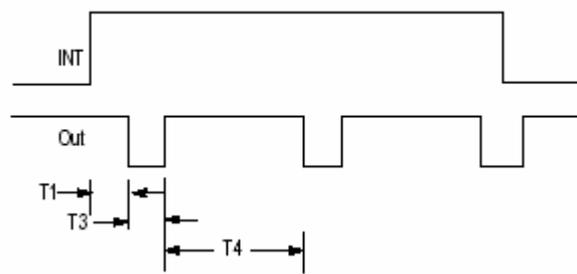


**Wash Wipe Operation**

Conditions:

- INT disconnected.
- CONT disconnected or connected to ground.

In this condition, the circuit will respond to the switching of W/W to Vbb after a time T1 (see T1 Debounce Timing). If W/W is disconnected or connected to ground before the end of T1; no action will be taken. After a time T1; the circuit will perform as shown on Figure 3. The output will turn on and remain on for the duration of W/W. When W/W becomes inactive, the output will remain on for  $T2 = 96 \times 4 \times tb1$ .

Figure 3. Switching Waveform W/W Timing

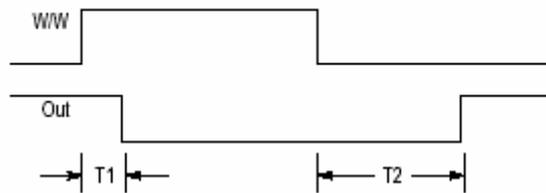

**Continuous Operation**

In this condition, the circuit responds to the switching of CONT to Vbb. If CONT is connected to Vbb, the output will turn on regardless of the state of any other input and remain on so long as CONT is active. This command operates directly on the relay output and does not interfere with any other timing. Therefore, the circuit will not be reset to a defined state.

**Wash Wiper and Intermittent Operation**

If W/W is activated during the time INT is also activated, the circuit will respond to W/W after a time T1 (see T1 Debounce Timing). The output will turn on after T1, and stay on for a time  $T2 + T3$  after W/W is deactivated. Following this, normal operation of INT will occur. This is shown on Figure 4.

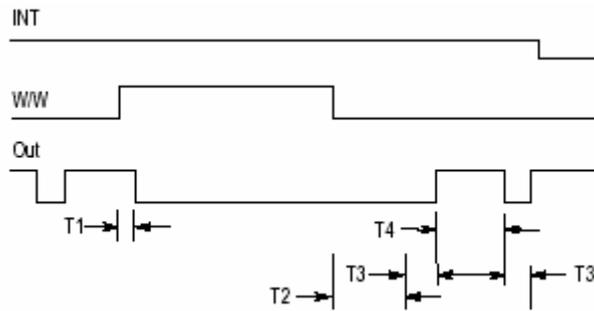


Figure 4. Switching Waveform W/W and INT Active

### T1 Debounce Timing

The criteria for an input signal to be detected is that it should be active at two successive negative internal clock edges. The inputs are sampled on the negative edge of the internal clock. If two consecutive samples are the same, the input is detected as being in that state. Hence the time T1 from a signal becoming active to the time that the circuit responds can be anytime from  $4 \times t_{b1}$  to  $2 \times 4 \times t_{b1}$  (due to synchronizing the input to the oscillator period) when the oscillator is oscillating with a time base of  $t_{b1}$  and  $4 \times t_{b2}$  to  $2 \times 4 \times t_{b2}$ , when the oscillator is oscillating with a time base of  $t_{b2}$ . The following table summarizes all T1 debounce timings:

Condition	Debounce Time
INT Active	$4 \times t_{b1}$ to $2 \times 4 \times t_{b1}$
INT Inactive	$4 \times t_{b1}$ to $2 \times 4 \times t_{b1}$
W/W Active When INT Inactive	$4 \times t_{b1}$ to $2 \times 4 \times t_{b1}$
W/W Active When INT Active During T3	$4 \times t_{b1}$ to $2 \times 4 \times t_{b1}$
W/W Active When INT Active During T4	$4 \times t_{b1}$ to $2 \times 4 \times t_{b2}$

### Two IL33197A Devices Using One Decoupling Resistor and Capacitor

Two devices may be connected to the power source using a common R1 resistor for protection against overvoltages. If this is done it should be noted that the current flowing through R1 is increased and hence the voltage drop across R1 is increased.

### Overvoltage Protection

In reference to the Block Diagram and Typical Application, all of the foregoing operational cases require:

$R1 \geq 100 \Omega$ ,  $C1 \geq 47 \mu F$

$R3 \geq 1.0 k\Omega$ ,  $R4 \geq 4.7 k\Omega$ ,  $R5 \geq 4.7 k\Omega$

The circuit will not operate during the transient conditions. By using the above component values, the circuit will be able to sustain the following overvoltages on Vbb without permanent damage:

1. +28 V for 5 minutes
2. -15 V for 5 minutes
3. -16 V cycled off for 1.0 minute
4. +80 V pulse decaying exponentially to 8.0 V in 400 ms repeated 3 times at 1.0 minute intervals.
5.  $\pm 300$  V pulse decaying exponentially to 30 V in 300 ms with a maximum energy of 1.0 Joule.
6.  $\pm 100$  V pulse decaying exponentially to 10 V in 2 ms.

## Recommended External Component Values

Below are the recommended component values to ensure the device will operate properly, and that all specified parameters will stay within their tolerances. R1 should be greater than 100Ω; recommended value of 220Ω. R1 can be up to 500Ω, but in this case the  $t_{b2v}$  parameter could be out of its specified value (see Electrical Characteristics and Note 1). Also, the minimum operating voltage range should be greater than 8.0 V. The following values should be adhered to:

$$10 \text{ k}\Omega \leq R2 \leq 68 \text{ k}\Omega$$

$$1.5 \text{ k}\Omega \leq R3 \leq 47 \text{ k}\Omega$$

$$R4 \geq 4.7 \text{ k}\Omega$$

$$R5 \geq 4.7 \text{ k}\Omega$$

$$C1 \geq 47 \text{ }\mu\text{F}$$

$$47 \text{ nF} \leq C2 \leq 470 \text{ nF}$$

## Application Information

The following is an example of timing calculations using the following external components values: R2 = 22 kΩ, R3 = 2.2 kΩ, C2 = 100 nF (Referring to Block Diagram and Typical Application).

Oscillator Time Base Calculation:

$$t_{b1} \text{ duration} = t_{b1} \times 4 \times R2 \times C2 = 1 \times 4 \times 27e^3 \times 100e-9 = 10.8 \text{ ms}$$

$$t_{b2} \text{ duration}_g \text{ (INT to Gnd)} = t_{b2g} \times R3 \times C2 = 15.5 \times 2.2e^3 \times 100e-9 = 3.41 \text{ ms}$$

$$t_{b2} \text{ duration}_v \text{ (INT to Vbb)} = t_{b2v} \times R3 \times C2 = 12.1 \times 2.2e^3 \times 100e-9 = 2.66 \text{ ms}$$

Intermittent timing calculation:

$$T3 = 16 \times 4 \times t_{b1} \text{ duration} = 16 \times 4 \times 10.8 \text{ ms} = 691 \text{ ms}$$

$$T4 = 144 \times 4 \times t_{b2} \text{ duration}_g = 144 \times 4 \times 3.41 \text{ ms} = 1.96 \text{ s}$$

(INT connected to Gnd)

$$T4 = 144 \times 4 \times t_{b2} \text{ duration}_v = 144 \times 4 \times 2.66 \text{ ms} = 1.53 \text{ s}$$

(INT connected to Vbb)

Wash wipe timing calculation:

$$T2 = 96 \times 4 \times t_{b1} = 96 \times 4 \times 10.8 \text{ ms} = 4.15 \text{ s}$$

T1 Debounce Time Calculation (see T1 Debounce Timing)

When oscillator is oscillating at  $t_{b1}$ :

$$T1 \text{ minimum} = 4 \times t_{b1} = 4 \times 10.8 \text{ ms} = 43.2 \text{ ms}$$




$$T1 \text{ maximum} = 2 \times 4 \times t_{b1} = 2 \times 4 \times 10.8 \text{ ms} = 86.4 \text{ ms}$$

When oscillator is oscillating at  $t_{b2}$ :

$$T1 \text{ minimum (INT connected to Gnd, } t_{b2g}) = 4 \times t_{b2} = 4 \times 3.41 \text{ ms} = 13.6 \text{ ms}$$

$$T1 \text{ maximum (INT connected to Gnd, } t_{b2g}) = 2 \times 4 \times t_{b2} = 2 \times 4 \times 3.41 \text{ ms} = 27.3 \text{ ms}$$

**N SUFFIX PLASTIC DIP  
(MS - 001BA)**

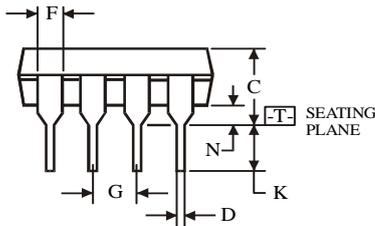




$\oplus 0.25 (0.010) \text{ (M) T}$

Symbol	Dimension, mm	
	MIN	MAX
A	8.51	10.16
B	6.1	7.11
C		5.33
D	0.36	0.56
F	1.14	1.78
G	2.54	
H	7.62	
J	0°	10°
K	2.92	3.81
L	7.62	8.26
M	0.2	0.36
N	0.38	

**NOTES:**

- Dimensions "A", "B" do not include mold flash or protrusions.  
Maximum mold flash or protrusions 0.25 mm (0.010) per side.

**D SUFFIX SOIC  
(MS - 012AA)**

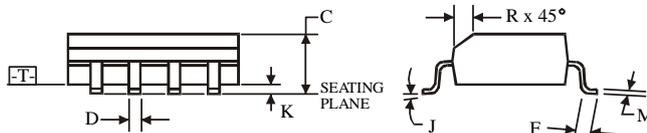

$\oplus 0.25 (0.010) \text{ (M) T C (M)}$

Symbol	Dimension, mm	
	MIN	MAX
A	4.8	5
B	3.8	4
C	1.35	1.75
D	0.33	0.51
F	0.4	1.27
G	1.27	
H	5.72	
J	0°	8°
K	0.1	0.25
M	0.19	0.25
P	5.8	6.2
R	0.25	0.5

**NOTES:**

- Dimensions A and B do not include mold flash or protrusion.
- Maximum mold flash or protrusion 0.15 mm (0.006) per side for A; for B - 0.25 mm (0.010) per side.